

# Palladium® Designer Kickplates




Model 30



Model 20



Model 10

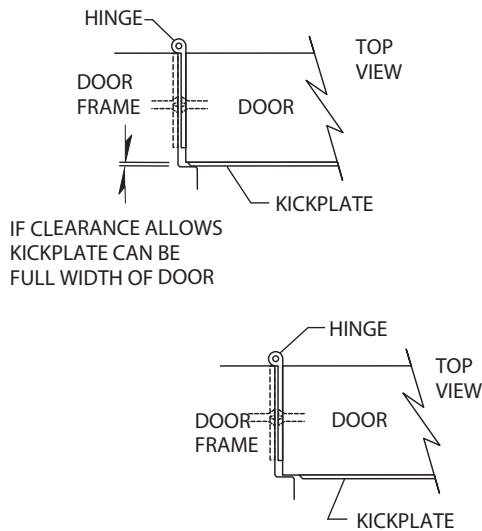

- Add a decorative touch with Palladium® Designer Kickplates in two styles while protecting doors from scratches and dents
- Achieve a finished look with factory beveled edges
- Coordinate interiors with 100 Standard Colors and 11 Global Colours
- Installs easily with a peel and stick adhesive backing
- GREENGUARD Indoor Air and Children & Schools Certified

IPC.444/REV.9

Installation Hotline • 866.EZINPRO  
 Inprocorp.com • 800.222.5556 • 262.679.9010  
 World Headquarters S80 W18766 Apollo Drive, Muskego, WI 53150 USA

**IPC®**  
 DOOR + WALL PROTECTION SYSTEMS  
 A DIVISION OF INPRO®

# Palladium® Designer Kickplates

## Suggested Specifications

### PART 1 - GENERAL

#### 1.01 SUMMARY

A. Kickplates for door protection

#### 1.02 SECTION INCLUDES

A. Palladium® Designer Kickplates

#### 1.03 REFERENCES

A. American Society for Testing and Materials (ASTM)

B. National Building Code of Canada (NBC)

C. National Fire Protection Association (NFPA)

D. Society of Automotive Engineers (SAE)

E. Underwriters Laboratory (UL)

F. Underwriters Laboratory of Canada (ULC)

G. Underwriters Laboratory, Canada Accepted (cUL)

H. Uniform Building Code (UBC)

#### 1.04 SYSTEM DESCRIPTION

A. Performance Requirements: Provide kickplates that conform to the following requirements of regulatory agencies and the quality control of IPC Door and Wall Protection Systems™, InPro Corporation.

1. Fire Performance Characteristics: Provide UL Classified kickplates conforming with NFPA Class A fire rating. Surface burning characteristics, as determined by UL-723 (ASTM E-84), for kickplates installed with 3M Fastbond 30, shall be flame spread of 10 and smoke development of 95-140 for .040" (1mm) thick material or flame spread of 15 and smoke development of 300 for .060" (1.5mm) thick material. Provide ULC (Canada) listed kickplates conforming to the requirements of the National Building Code of Canada 2010, Subsection 3.1.13. Surface burning characteristics, as determined by CAN/ULC-S102.2, shall be flame spread of 15 and smoke developed of 30.

2. Fire Performance Characteristics: Provide UL Classified Cladding Material for fire door and fire door frames intended for application on listed door frames used with hollow metal and steel covered composite type fire doors rated up to 3 hours in accordance with UL 10B. Provide cUL (Canada accepted) Cladding Material intended for application on listed fire door frames used on hollow metal and steel composite type fire doors rated up to 3 hours in accordance with CAN4-S104-M80.

3. Fire Performance Characteristics: Provide UL Classified Cladding Material for doors and door frames intended for application on classified door frames used with wood composite and wood core type fire doors rated up to 1-1/2 hours in accordance with UL 10B. Provide cUL (Canada accepted) Cladding Material intended for application on classified wood composite and wood core type fire doors rated up to 1-1/2 hours in accordance with CAN4-S104-M80.

4. Self Extinguishing: Provide kickplates with a CC1 classification, as tested in accordance with the procedures specified in ASTM D-635-74, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position, as referenced in UBC 52-4-1988.

5. Provide sheet materials that have been tested and results filed in compliance with article 15, part 1120 of the New York State uniform fire prevention and building code. DOS # 09960-930504-4001.

6. Impact Strength: Provide rigid vinyl sheet materials that have an Impact Strength of 30.4 ft-lbs/inch of thickness as tested in accordance with the procedures specified in ASTM D-256-90b, Impact

Resistance of Plastics.

7. Chemical and Stain Resistance: Provide kickplates that show resistance to stain when tested in accordance with applicable provisions of ASTM D-543.

8. Fungal and Bacterial Resistance: Provide rigid vinyl that does not support fungal or bacterial growth as tested in accordance with ASTM G-21 and ASTM G-22.

9. Color Consistency: Provide components matched in accordance with SAE J-1545 - (Delta E) with a color difference no greater than 1.0 units using CIE Lab, CIE CMC, CIE LCh, Hunter Lab or similar color space scale systems.

#### 1.05 SUBMITTALS

A. Product Data: Manufacturer's printed product data for each type of Palladium® Designer Kickplates specified.

B. Detail Drawings: Mounting details with the appropriate adhesives for specific project substrates.

C. Samples: Verification samples of Palladium® Designer Kickplates 8" (203mm) square, of each type and color indicated.

D. Manufacturer's Installation Instruction: Printed installation instructions for Palladium® Designer Kickplates.

#### 1.06 DELIVERY, STORAGE AND HANDLING

A. Deliver materials in unopened factory packaging to the jobsite

B. Inspect materials at delivery to assure that specified products have been received.

C. Store in original packaging in a climate controlled location away from direct sunlight.

#### 1.07 PROJECT CONDITIONS

A. Environmental Requirements: Products must be installed in an interior climate controlled environment.

#### 1.08 WARRANTY

A. Standard IPC Limited Lifetime Warranty against material and manufacturing defects.

### PART 2 - PRODUCTS

#### 2.01 MANUFACTURER

A. Acceptable Manufacturer: IPC Door and Wall Protection Systems™, InPro Corporation, PO Box 406 Muskego, WI 53150 USA; Telephone: 800-222-5556, Fax: 888-715-8407, Internet address: <http://www.inprocorp.com>

B. Substitutions: Not permitted

C. Provide all Palladium® Designer Kickplates and wall protection from a single source.

#### 2.02 MANUFACTURED UNITS

A. Kickplates

1. Palladium® Designer Kickplates Options

Item # Thickness:

KP41 .040" = 3/64" (1mm)-standard

KP42 .040" = 3/64" (1mm)-standard

KP43 .040" = 3/64" (1mm)-standard

KP61 .060" = 1/16" (1.5mm)-standard

KP62 .060" = 1/16" (1.5mm)-standard

KP63 .060" = 1/16" (1.5mm)-standard

Available left or right side door mount.

Size: Indicated on door schedule in construction drawings.

Backing: Adhesive backed.

Unbacked: 3M Fastbond 30 recommended contact cement.

2. Smooth Palladium® Designer Kickplates Options:

KP41SM .040" = 3/64" (1mm)-standard

KP42SM .040" = 3/64" (1mm)-standard

KP43SM .040" = 3/64" (1mm)-standard

KP61SM .060" = 1/16" (1.5mm)-standard

KP62SM .060" = 1/16" (1.5mm)-standard

KP63SM .060" = 1/16" (1.5mm)-standard

Available left or right side door mount.

Size: Indicated on door schedule in construction drawings.

Backing: Adhesive backed.

Unbacked: 3M Fastbond 30 recommended contact cement.

#### 2.03 MATERIALS

A. Vinyl: Palladium® Designer Kickplates shall be manufactured from chemical and stain resistant polyvinyl chloride with the addition of impact modifiers. No plasticizers shall be added (plasticizers may aid in bacterial growth).

#### 2.04 FINISHES

A. Color or pattern of Palladium® Designer Kickplates to be selected by the architect from the IPC finish selection. Surface shall have a velvet texture or a smooth finish.

### PART 3 - EXECUTION

#### 3.01 EXAMINATION

A. Examine areas and conditions in which the kickplate systems will be installed.

1. Complete all finishing operations, including painting, before beginning installation of kickplate system materials.

B. Door surface shall be dry and free from dirt, grease and loose paint.

#### 3.02 PREPARATION

A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

#### 3.03 INSTALLATION

A. General: Locate the kickplate as indicated on the approved detail drawing for the appropriate substrate and in compliance with the IPC installation instructions. Install kickplate level and plumb at the height indicated on the drawings.

B. Installation of Palladium® Designer Kickplates

1. Contact Cement: Adhere to substrate with Fastbond 30, a nonflammable, high strength, water-dispersed contact adhesive, with very little odor. Smooth roll surface.

2. Factory Applied Adhesive: Adhere to substrate with manufacturer applied self-stick adhesive. Smooth roll surface.

#### 3.04 CLEANING

A. At completion of the installation, clean surface in accordance with the IPC clean up and maintenance instructions.

Installation Hotline • 866.EZINPRO

Inprocorp.com • 800.222.5556 • 262.679.9010

World Headquarters S80 W18766 Apollo Drive, Muskego, WI 53150 USA

IPC®

DOOR + WALL PROTECTION SYSTEMS  
A DIVISION OF INPRO®